

NOX ANALGESIA SOLUTION PRIVATE LIMITED

# First Time in Kenya MOST COST EFFECTIVE LAUGHING GAS UNIT

SAFEST MACHINE




info@larioxhealth.com

 $\square$ 




**ANXIOLYSIS** A level of sedation in which a person is very relaxed and may be awake. The person is able to answer questions and follow instructions. Anxiolysis is caused by special drugs and is used to help relieve anxiety during certain medical or surgical procedures also called minimal sedation.

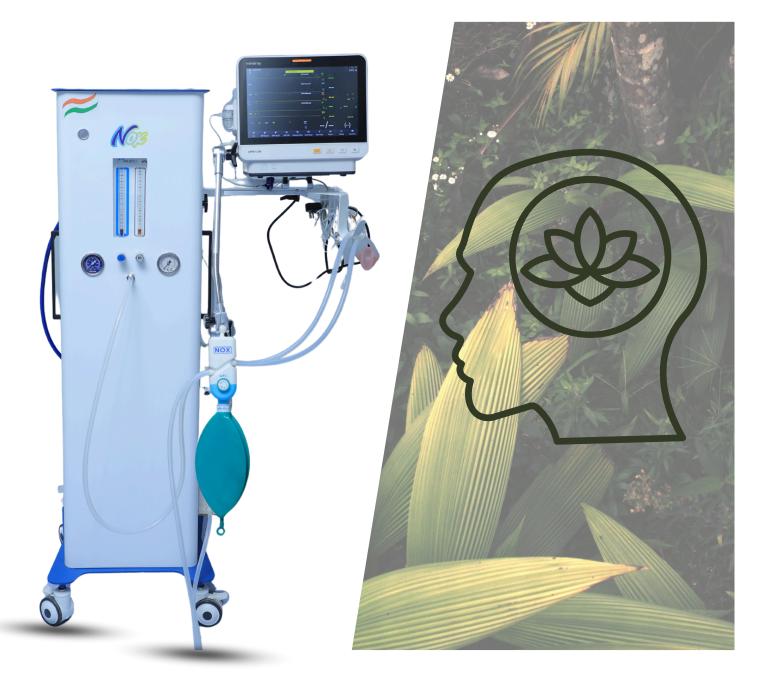

**ANALGESIA** Loss of sensation of pain that results from an interruption in the nervous system pathway between sense organ and brain.



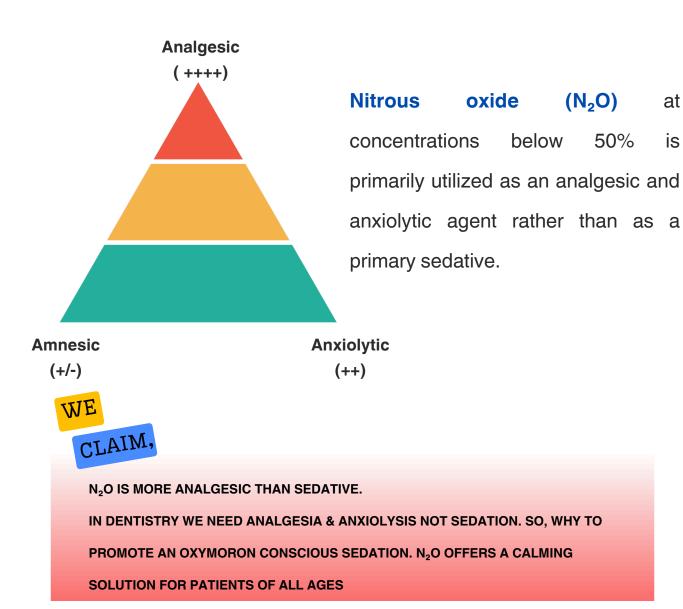

## **NOX Sterility of Equipment**

1. Circuit & mask both autoclavable

2. Only circuit which can be used with HME filter (antibacterial. anti viruses) to avoid Cross Contamination

3. Dry sterilization is also possible with alcohol wipes



4. ETO sterilization is also possible



at

is

50%

NOX ANALGESIA SOLUTION PRIVATE LIMITED

## **Three Major Challenges in Dental Patient**

#### 1.Fear of Pain



2. Apprehension (fear of unknown)



3. Anxiety



N<sub>2</sub>O easily manages this to make your Patient Comfortable and

Pain - Free Experience.

### NOX as a Day-Care Tool

- Excellent analgesia. (Pain-free experience)
- Titrable calmness (Anxiolysis)
- Fastest onset and Rapid recovery
- No- residual effect. (Immediate discharge of Patient is possible)
- Suitable for all age patient
- Lowest operational cost with NOX Machine
- Can be used with minimal pre-procedure instructions
- No major Contraindications can be used in highly morbid patient too





## **Fail-Proof Safety Features**

We have integrated a wide range of features into our NOX systems to provide complete control for the healthcare team, thereby ensuring the utmost safety for patients undergoing procedures. These features include:






NOX ANALGESIA SOLUTION PRIVATE LIMITED

## Technical Specifications NOX ADVAIT

Oxygen	Maximum flow 10L/min.
N <sub>2</sub> 0	Maximum flow 12L/min.
Dimension	(1260*385*450 MM)
Weight of machine	=50KG
Precisely calibrated flow	±100 ml/min
N <sub>2</sub> O	0 - 75%
O <sub>2</sub>	25% - 100%
Oxygen Flush	( >25L / min )
Rebreathing bag. Sizeable ale to patent weight. to decrease gas wastage.	e. (0.5L / 1L / 2L / 3L)
Adjustable mask size	(S/M/L)



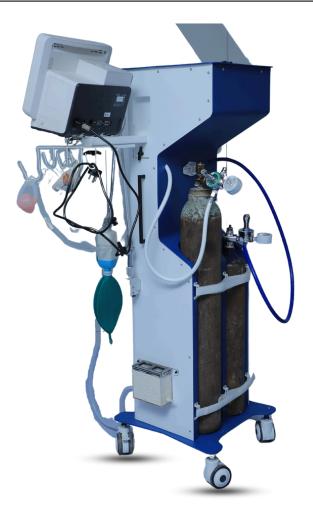

- Hypoxic guard flow meter (ISO/CE certified)
- Useful in both Cylinder & central-supply
- Equipped with Scavenging System
- Equipped with all safety standard Safety mechanism
- Only machine with Storage
- Positionable rebreathing bag to monitor respiration at Consultant's eye level



### **NOX – Signature Aspects**





NOX ANALGESIA SOLUTION PRIVATE LIMITED

NO

## NOX – Product Variant



#### NOX - ADVAIT WITH POWDER COATING

NOX - ARTHA WITH VINYL COATING NOX - DIGITAL ANANT POWDER COATING



